

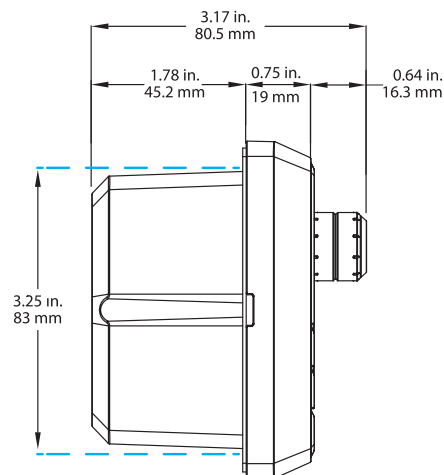
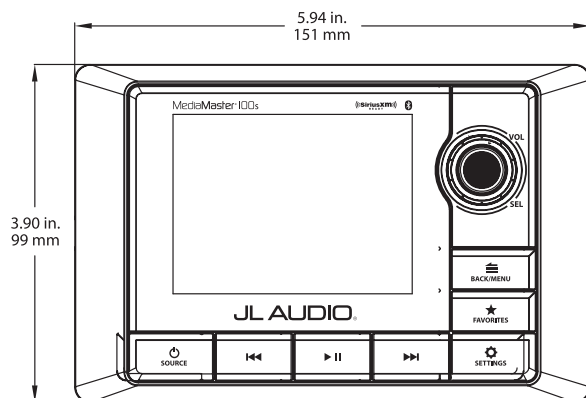
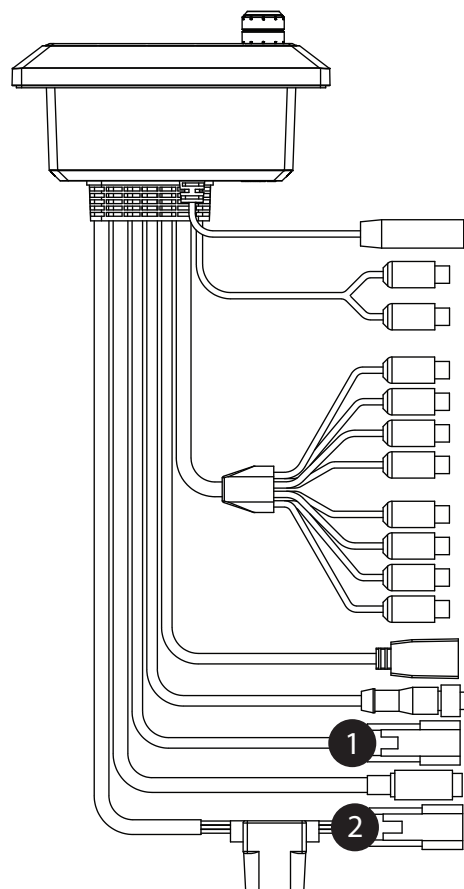


JL AUDIO®

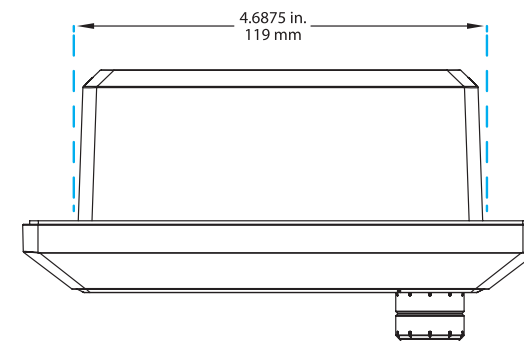

MediaMaster® 100s

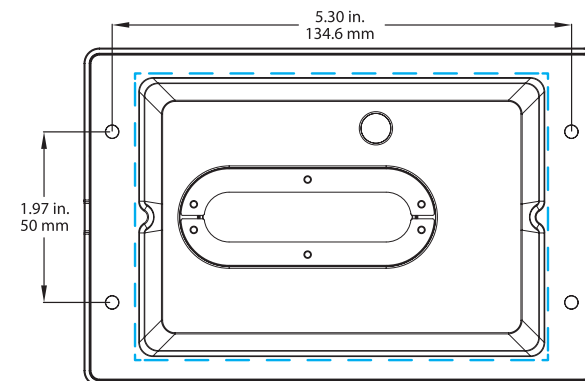

ANT – Motorola® Style Antenna

AUX-IN – To PreAmp Aux Source

ZONE1 (MAIN)

ZONE2

ZONE3 (SUB)

ZONE4 (FIXED LEVEL)

To Amplifier

USB – USB Storage Media or iPhone® 5 or 6

REMOTE – MediaMaster® MMR-20 Remote Control (Sold Separately)

CAN – NMEA2K Network


SIRIUSXM – SiriusXM® Connect Tuner (Sold Separately)

POWER CONNECTIONS

- +12VDC (Red)** – Switched +12V Power
- ILLUMINATION (Orange)** – +12V Lighting Circuit
- GROUND (Black)** – Ground
- AMP TURN-ON (Blue)** – Remote Output to Amplifier


5A Fuse

1 DT04-6P (female)




PINOUT	COLOUR	FUNCTION
2	RED	CAN-S
3	BLACK	CAN-C
4	WHITE	CAN-H
5	BLUE	CAN-L

2 DT04-4P (female)



PINOUT	COLOUR	LABEL
1	RED	+12V (BAT)
2	BLUE	REMOTE OUT
3	ORANGE	ILLUM
4	BLACK	GROUND

3 DT06-4S (male)



PINOUT	COLOUR	LABEL
1	RED	+12V (BAT)
2	BLUE	REMOTE OUT
3	ORANGE	ILLUM
4	BLACK	GROUND