

MOORING COVER INSTRUCTION SHEET**⚠ WARNING**

To prevent damage to your boat and/or cover please read and understand instructions before attempting to use cover

Features:


1. A special anti-pooling system is included to prevent large puddles from ruining your cover.
2. The high performance solution dyed all-weather fabric was chosen to allow stability, water repellency & breathe-ability.
3. The Vacu-Hold™ system allows trailering at highway speeds (65 mph) without billowing or buffeting.
4. The ratchet and drawstrap type attachment will allow easy, tight and secure installation.

CARE INSTRUCTIONS**Refer to**

<http://commercialsewing.com/cleaning.html>

Wash with warm soapy water (while installed if possible) and allow to air dry. For stubborn stains, mild detergent is recommended. Over time dirt and grime can build up on the cover and may dirty your vinyl. We suggest using a product such as Mr. Clean Magic Eraser to aid in removing this type of staining. Storing the boat in constant direct sunlight will shorten the life of the cover and the components used to construct it. We recommend storing the boat in a location that exposes it to some sun and also shades it throughout the day. Preferably morning sun and afternoon shade. Refer to the care and use section of commercialsewing.com for more information.

NOTE- As a preventative measure, we recommend periodically applying a no-seize type lubricant in the barrel of the ratchet, as indicated in the picture below.

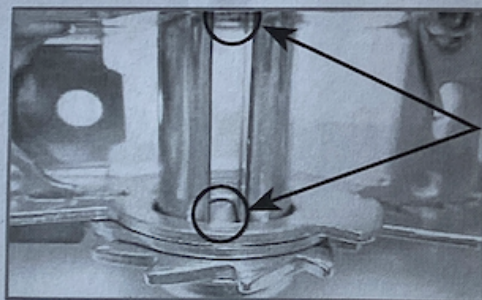

Place drop of lubricant as shown to both sides (top & bottom in this picture)

WARRANTY

This cover includes a two year warranty from date of purchase against any defects in material or workmanship. If you incur any problems or have any comments please contact your dealer or call Commercial Sewing Customer Service directly at (860) 482-5509.

INSTALLATION INSTRUCTIONS**Proper Cover Installation:**

- Place the cover on boat starting at front.
- Install pooling poles & TAPS 2 (Tower Anti-Pooling System) as necessary as you work your way to the back of the boat.
- **On some models:**
Disconnect side buckles and hook+loop then reconnect around the base of the tower.
- Maneuver in place until the cover fits over gunwale. Check the symmetry.
- Begin ratcheting by unzipping ratchet pocket(s) and pulling ratchet(s) handle in right-to-left motion until zippered ratchet pocket no longer sags but rests against the hull.

ISPARAGON/R0

INSTALLATION INSTRUCTIONS (CONT'D)

Hint: To properly install ratchet strap system;

- Pull on webbing to even the tension around the cover and again tighten the ratchet until it does not sag but rests against the boat. Tighten ratchet four to five more times. The ratchet should be very hard to pull with your pinky finger. Zip ratchet pocket closed.

⚠ WARNING

When using the tower up cover with the tower in the down position, trailering is not recommended. Also, the use of the pooling poles is recommended.

⚠ CAUTION

Readjust and retighten the cover after trailering and before storage. To prevent pooling do not allow snow and ice to accumulate on the cover.

Never trailer at speeds above the speed limit.

NOTICE

Proper installation and operation of this cover requires that it be very tight at the gunwale. Retighten as necessary before, after and during stops while trailering.

BE SURE cover is installed below gunwale before final ratchet adjustment. ZIP ratchet pocket closed for final installation.

⚠ WARNING

Zippered ratchet mechanism should be hand tightened only. Do not pry or attempt to operate ratchet mechanism with any type of tool.


REMOVAL INSTRUCTIONS

- Zip open ratchet pocket.
- Release pressure on ratchet.
- Once pressure is released pull out webbing to allow simple future installation, then close ratchet handle and ZIP POCKET closed (this is important to prevent damage in future installation).
- Remove and fold cover working from rear to front.

TAPS 2 (Tower Anti-Pooling System) INSTALLATION INSTRUCTIONS

Please read and understand instructions before attempting to use cover

- 1) Loosen rope at rear rope cleat.
- 2) Hook webbing loop around tower pylon.
- 3) Install cover, tightening ratchets about half way.
- 4) Pull rope tight and lock into rope cleat.
- 5) Finish tightening ratchets.
- 6) To uninstall, fully loosen rope by pulling up sharply. Then release the ratchets.

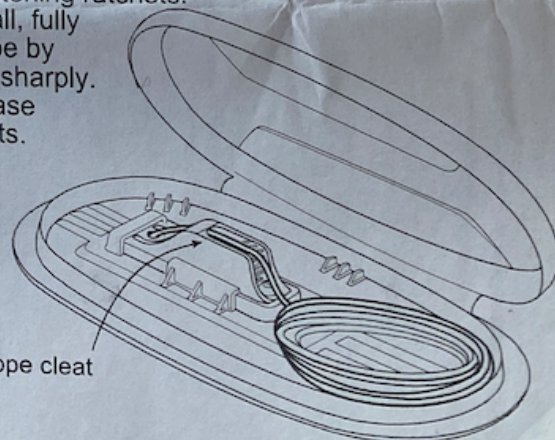

(#1) Rope cleat